

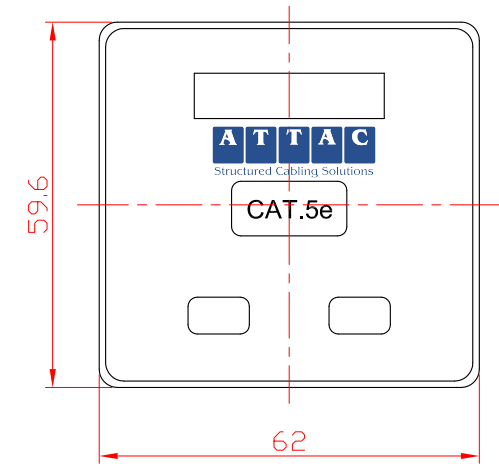
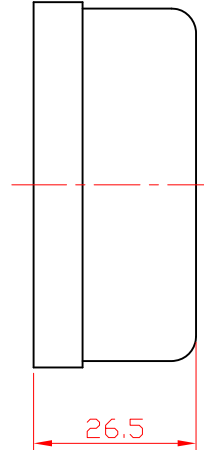


UTP CAT5E DUAL DATA BOX

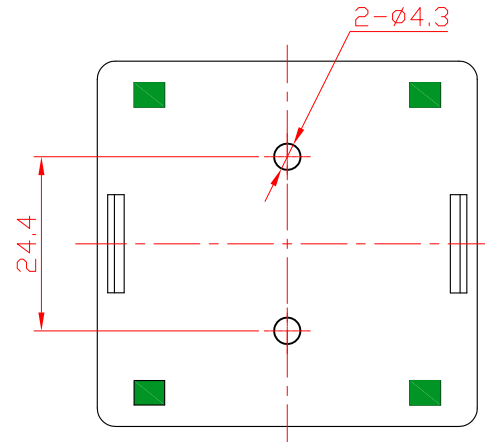

Name	Surface mount box
Type	UTP Surface Box
user for	Surface Box 2 Port UTP Cat.5E PCB Jack
Port	2 Port
Color	White
Application	Networking
Category	Cat5e,6 & 6A

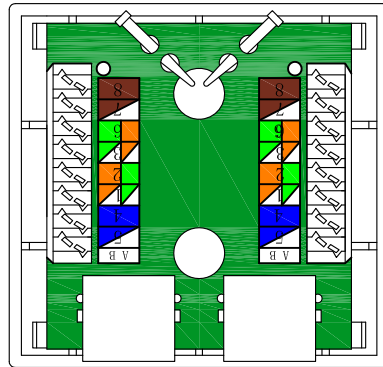

NOTES:

ELECTRICAL:


1. VOLTAGE RATING:125 VAC RMS
2. CURRENT RATING:1. 5AMP
3. CONTACT RESISTANCE:100MILLIOHMS MAX
4. INSULATION RESISTANCE:100 MEGOHMS
MIN @500 VDC
5. DIELECTRIC STRENGTH:750 VAC
RMS 60Hz, 1MIN

ENVIRONMENTAL:




1. STORAGE:-40°TO+85°
2. OPERATION:0°TO70°


MECHANICAL:

1. HOUSINGG MATERIAL:PC
2. INSERT MATERIAL:FAME RETARDANCY ABS
3. PCB MATERIAL:FR-4 T=1. 6mm
4. CONTACT MATERIAL:PHOSPHOR BRONZE
STAMP PIN T=0. 30mm
5. IDC CONTACT MATERIAL:PHOSPHOR
BRONZE T=0. 50mm WITH TIN PLATING
6. RJ45 JACK ;LIFE:750 TIMES MIN
7. IDC LIFE:200 TIMES MIN;



M4*60 SELF TAPPING SCREW

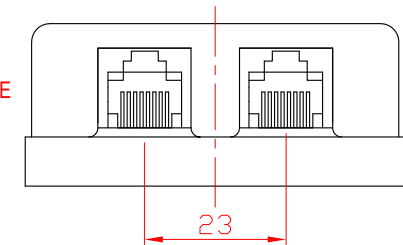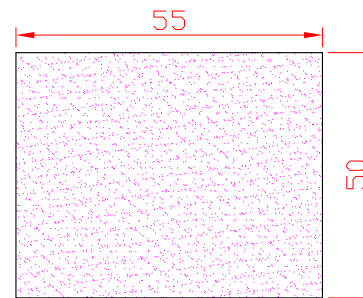

SYM	Number	Bill No.of Alteration	Signature	Date	Material					Item No.	
					Angles Projection		Size	Scale	Unit	Part Name	Surface Box 2 Port
Drawn				Tolerance		A4	X:1	mm	ERP		
Checked				0. 00-20. 00 ±0. 10 20. 00-50. 00 ±0. 15 50. 00-100. 00 ±0. 20							
Approved				100. 00- Angle ±0. 25 ±30°							
					Sheet	1 OF 1	Version: A/0		Part No.		