

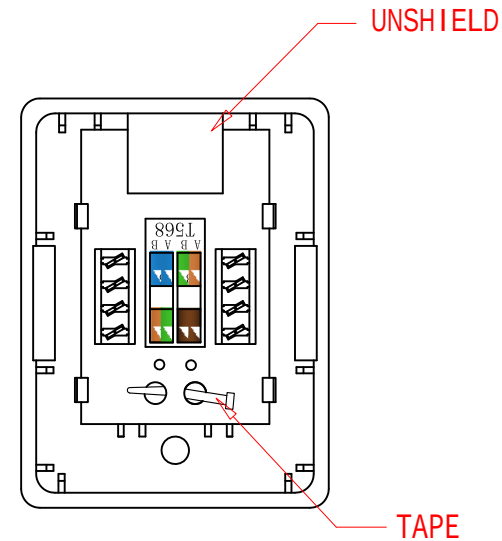
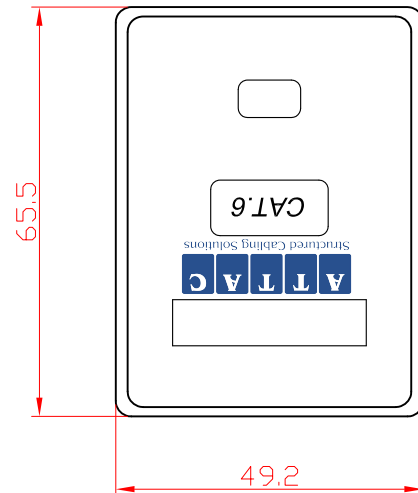


UTP CAT6 SINGLE DATA BOX

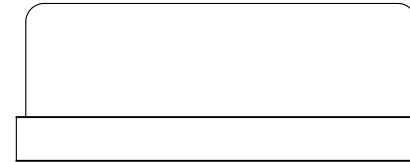

Name	Surface mount box
Type	UTP Surface Box
user for	Surface Box 1 Port UTP Cat.6 PCB Jack
Port	1 Port
Color	White
Application	Networking
Category	Cat5e,6 & 6A

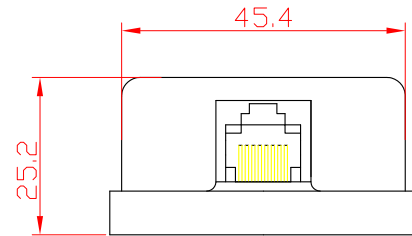

NOTES:

ELECTRICAL:


1. VOLTAGE RATING: 125 VAC RMS
2. CURRENT RATING: 1.5 AMP
3. CONTACT RESISTANCE: 100MILLIOHMS MAX
4. INSULATION RESISTANCE: 100 MEGOHMS MIN @500 VDC
5. DIELECTRIC STRENGTH: 750 VAC RMS 60Hz, 1MIN

ENVIRONMENTAL:

1. STORAGE: -40°TO+85°
2. OPERATION: 0°TO70°

MECHANICAL:

1. HOUSINGG MATERIAL: PC
2. INSERT MATERIAL: FAME RETARDANCY ABS
3. PCB MATERIAL: FR-4 T=1.6mm
4. CONTACT MATERIAL: PHOSPHOR BRONZE STAMP PIN T=0.30mm
5. IDC CONTACT MATERIAL: PHOSPHOR BRONZE T=0.50mm WITH TIN PLATING
6. RJ45 JACK ; LIFE: 750 TIMES MIN
7. IDC LIFE: 200 TIMES MIN;

SYM	Number	Bill No. of Alteration	Signature	Date	Material					Item No.	
					Angles Projection		Size	Scale	Unit	DWG No.	
Drawn				Tolerance			A4	X:1	mm	Part Name	ganeral assembly dyawing
Checked				0.00-20.00 ±0.10 20.00-50.00 ±0.15 50.00-100.00 ±0.20	ERP						
Approved				100.00- ±0.25 Angle ±30'							
				Sheet							1 OF 1