


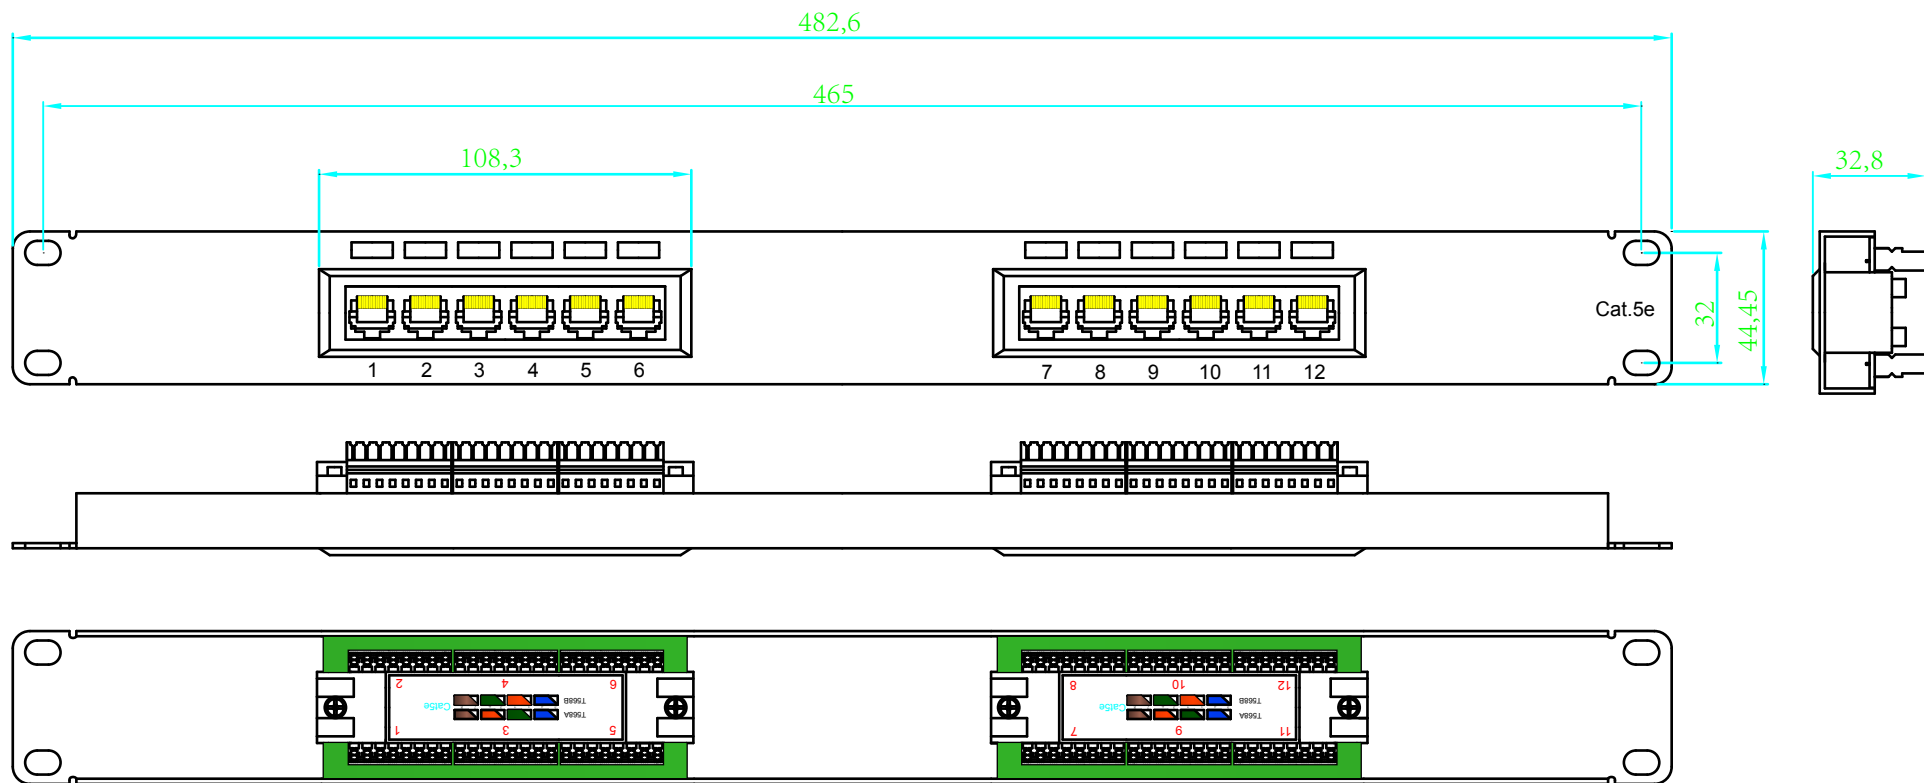

NOTES:

ELECTRICAL:

1. VOLTAGE RATING:125 VAC RMS
2. CURRENT RATING:1.5AMP
3. CONTACT RESISTANCE:100MILLIOHMS MAX
4. INSULATION RESISTANCE:1000 MEGOHMS MIN @500 VDC
5. DIELECTRIC STRENGTH:750 VAC RMS 60Hz, 1MIN


ENVIRONMENTAL:

1. STORAGE:-40° TO+85°
2. OPERATION:0° TO70°

CONFORM TO TIA/EIA 568A Cat5e

MECHANICAL:

1. HOUSING MATERIAL:PBT UL94V-0
2. PANEL FRAME:CARBON STEEL, POWDER COATING IN BLACK COLOR
3. PCB MATERIAL:FR-4 T=1.6mm
4. RJ45 JACK LIFE:750 TIMES MIN
5. IDC MATERIAL:PC UL 94V-0, CONTACT:PHOSPHOR BRONZE WITH NICKEL PATING

TITLE AP12			SCALE	1:2	 THIRD ANGLE PROJECTION
			MATERIAL		
DRAWN			WEIGHT		SHEET 1 OF 1
DESIGNED			Hangzhou Xitianqi Import & Export Co., Ltd.		
APPROVAL					