

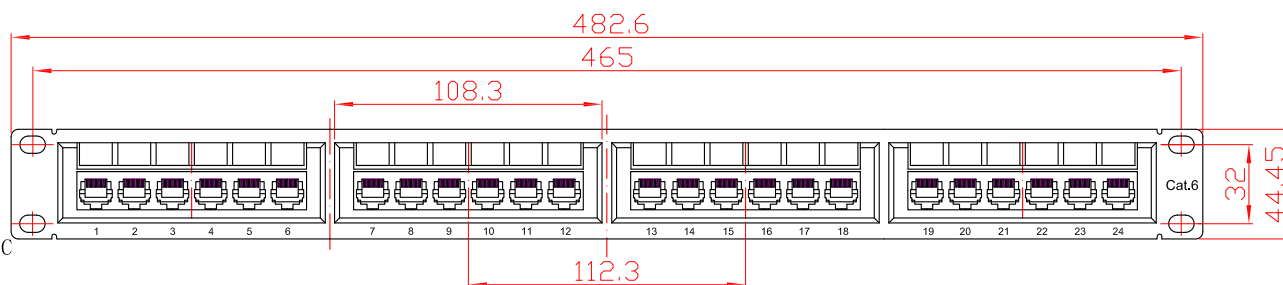
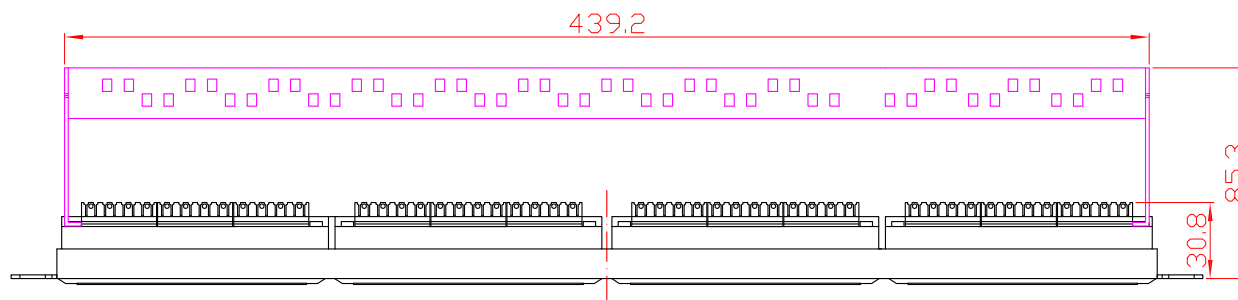


UTP 24 Port Cat6 Patch Panel

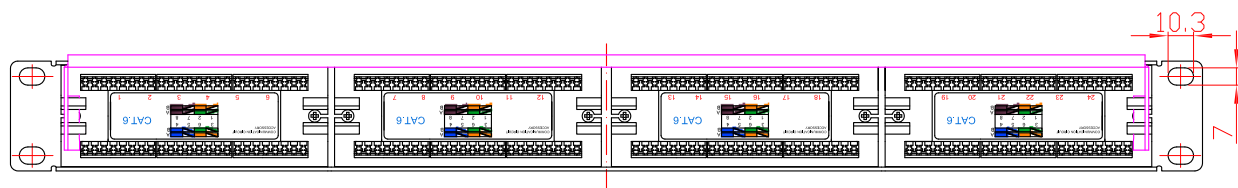

Name	UTP 24 Port Cat6 Patch Panel
Type	Krone&110 Dual IDC Patch Panel With or W/T back bar
user for	19"1U UTP Cat6 Patch Panel 24 Ports Krone&110 Dual IDC
Port	24 Port Patch Panel
Color	Black
Application	Networking
Category	Cat5e/6/6A
Size	19 Inches



NOTES:

ELECTRICAL:


1. VOLTAGE RATING:125 VAC RMS
2. CURRENT RATING:1.5AMP
3. CONTACT RESISTANCE:100MILLIOHMS MAX
4. INSULATION RESISTANCE:1000 MEGOHMS MIN @500 VDC
5. DIELECTRIC STRENGTH:750 VAC RMS 60Hz, 1MIN

ENVIRONMENTAL:

1. STORAGE:-40° TO+85°
2. OPERATION:0° TO70°

MECHANICAL:

1. HOUSING MATERIAL:PBT;
2. PANEL FRAME:CARBON STEEL, POWDER, COATING IN BLACK COLOR, Spcc1.5mm;
3. PCB MATERIAL:FR-4 T=1.6mm ;
4. IDC MATERIAL:PC ,CONTACT:PHOSPHOR BRONZE; WITH NICKEL PATING ;
5. RJ45 JACK LIFE:750 TIMES MIN;
6. IDC LIFE:200 TIMES MIN;
7. WIRE:AWG 23-26;

SYM	Number	Bill No. of Alteration	Signature	Date	Material					Item No.		
					Angles Projection		Size	Scale	Unit	DWG No.		
Drawn			Tolerance			A4	X:1	mm	Part Name	ganeral assembly dyawing		
Checked			0.00-20.00 ±0.10 20.00-50.00 ±0.15 50.00-100.00 ±0.20						ERP	10100100		
Approved			100.00- ±0.25 Angle ±30°						Part No.			
					Sheet		1 OF 1		Version: A/0			