
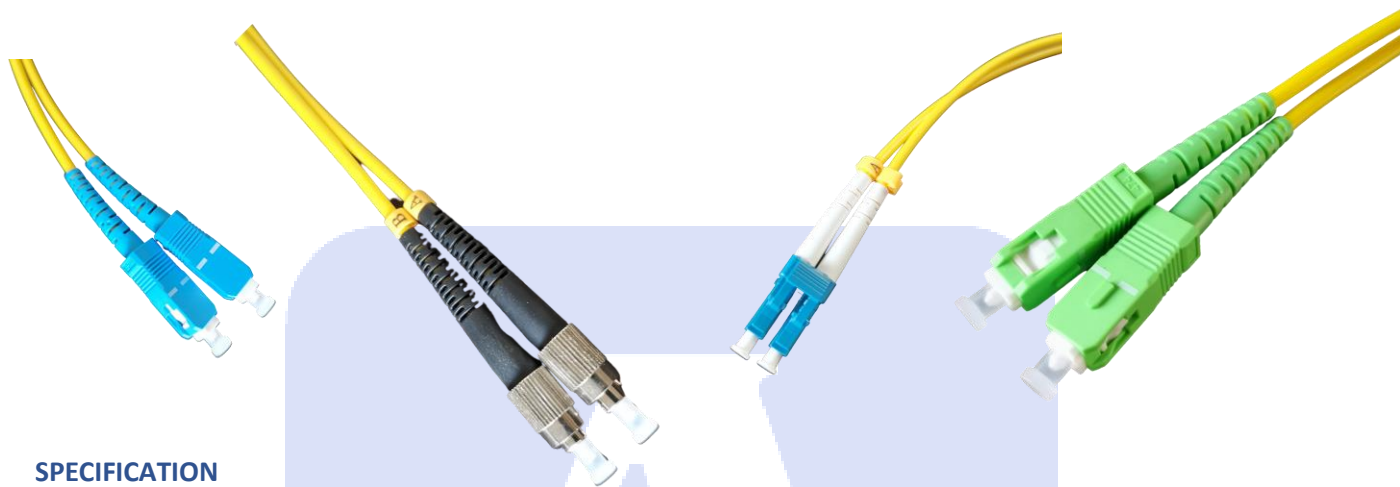


# PATCHCORDS SPEC SHEET

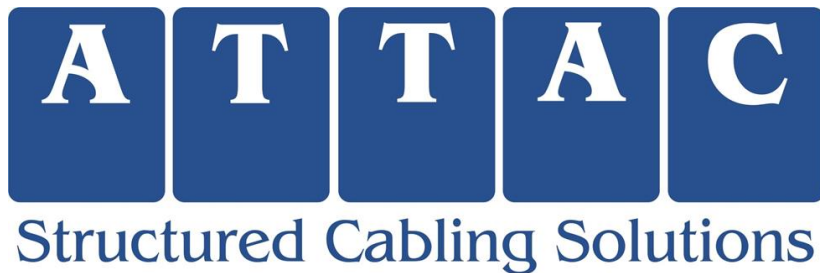

## SPECIFICATION

| Item      | Mode Type  | Number of fiber  | Cable Material | Cable Diameter       | Connect or Type                      | Fiber Type  |
|-----------|------------|------------------|----------------|----------------------|--------------------------------------|-------------|
| PatchCord | Singlemode | Simplex / Duplex | LSZH/PVC       | 0.9mm、2.0mm or 3.0mm | SC/APC, SC/UPC/LC/APC, LC/UPC, FC/PC | G657A/G652D |

| Item                  | Unit  | Specification          |        |                 |       |
|-----------------------|-------|------------------------|--------|-----------------|-------|
|                       |       | SM                     |        |                 | MM    |
|                       |       | SC/PC                  | SC/APC | SC/UPC          | SC/PC |
| Insertion Loss        | dB    | ≤0.20                  |        |                 |       |
| Max. Insertion Loss   | dB    | ≤0.30                  |        |                 |       |
| Repeatability         | dB    | ≤0.10                  |        |                 |       |
| Changeability         | dB    | ≤0.20                  |        |                 |       |
| Return Loss           | dB    | 40                     | 50     | 60              | /     |
| Operation Temperature | ℃     | -25~+70                |        |                 |       |
| Storage Temperature   | ℃     | -40~+85                |        |                 |       |
| Fiber type            | um    | 9/125                  |        | 50/125;62.5/125 |       |
| Core number           | /     | single or dual fiber   |        |                 |       |
| Durability            | times | ≥1000                  |        |                 |       |
| Industry Standard     | /     | Bellcore TA-NWT-001209 |        |                 |       |