


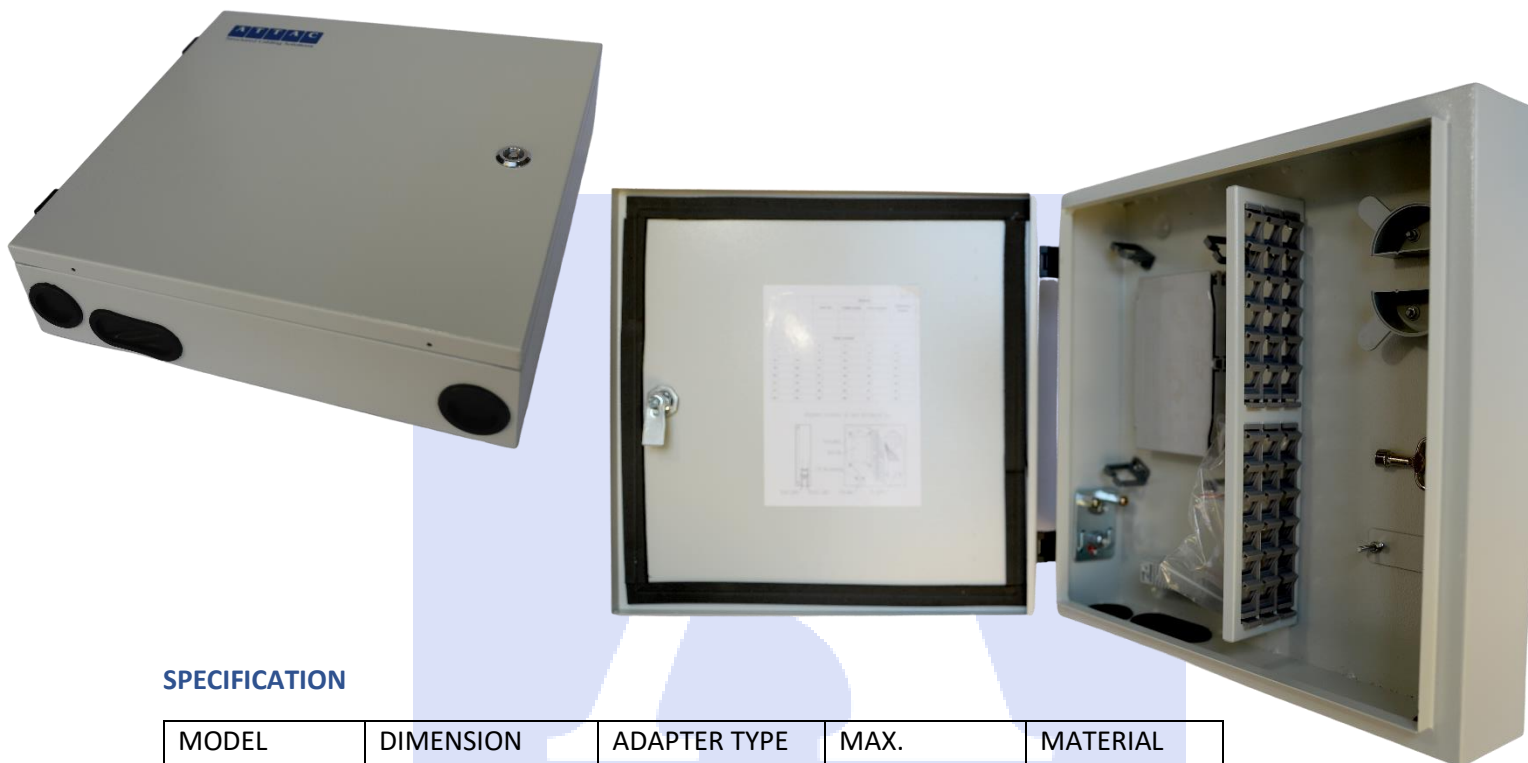

SPECIFICATION

MODEL	DIMENSION (L x W) mm	ADAPTER TYPE	MAX. CAPACITY	MATERIAL
KB48	350 x 320 x 100	SC/UPC Simplex SC/APC Simplex LC/UPC Duplex LC/APC Duplex	24FO	Cold-rolled Steel

FEATURES

- 1) Relative Humidity $\leq 95\%$ (+40°C)
- 2) Operating Temperature: $-40^{\circ}\text{C} \sim +60^{\circ}\text{C}$
- 3) Wall & Pole mountable
- 4) Weight: 8KGS