



Cat5e RJ45 Keystone Jack

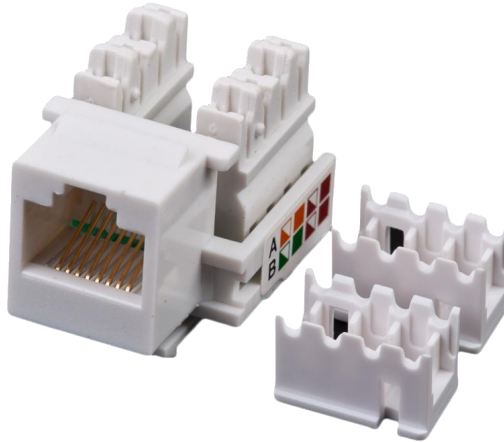

Name	KEYSTONE JACK
Type	CAT5E KEYSTONE JACK
user for	UTP Cat.5e Keystone Jack Dual IDC Type,90 Degree
Product Name	Unshielded JACK
Application	Networking
Category	Cat3/Cat5e/Cat6/Cat6A
Testing	FLUKE

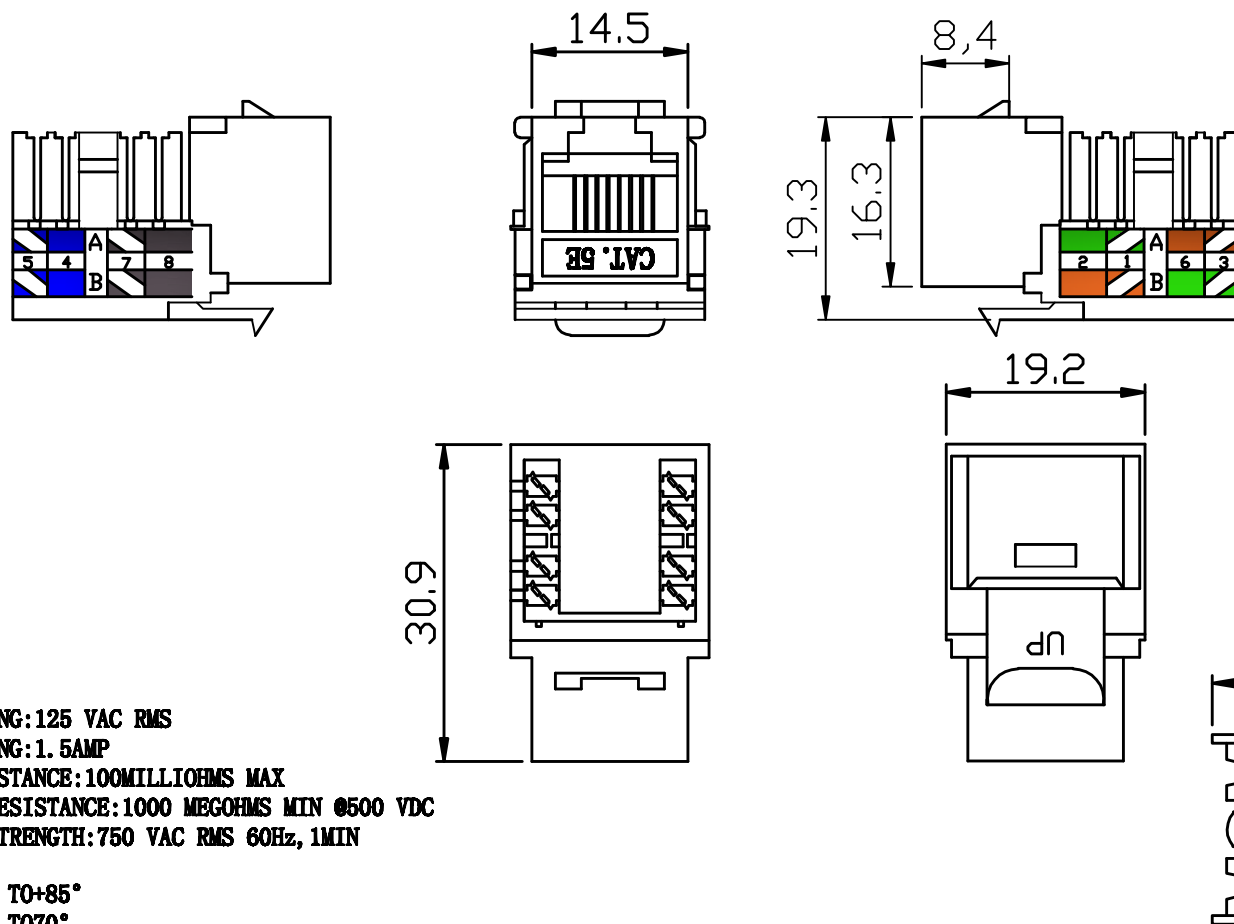

NOTES:

ELECTRICAL:


1. VOLTAGE RATING:125 VAC RMS
2. CURRENT RATING:1.5AMP
3. CONTACT RESISTANCE:100MILLIOHMS MAX
4. INSULATION RESISTANCE:1000 MEGOHMS MIN @500 VDC
5. DIELECTRIC STRENGTH:750 VAC RMS 60Hz, 1MIN

ENVIRONMENTAL:

1. STORAGE:-40° TO+85°
2. OPERATION:0° TO70°

MECHANICAL:

1. HOUSINGG MATERIAL:PC UL94V-0
2. INSERT MATERIAL:FAME RETARDANCY ABS UL94V-0
3. PCB MATERIAL:FR-4 T=1.6mm
4. CONTACT MATERIAL:PHOSPHOR BRONZE STAMP PIN T=0.30mm
5. IDC CONTACT MATERIAL:PHOSPHOR BRONZE T=0.50mm WITH TIN PLATING
6. RJ45 JACK ;IFE:750 TIMES MIN
7. IDC LIFE:200 TIMES MIN
8. WIRE:AWG 24-26
9. TIA CAT 5E Perm. link Test:Worst pair NEXT margin $\geq$ 3. dB
10. Retentiveness of insertion structure:50N 60 $\pm$ 5s

TITLE			SCALE	2:1	 THIRD ANGLE PROJECTION
			MATERIAL		
DRAWN			WEIGHT		SHEET 1 OF 1
DESIGNED					
APPROVAL					