
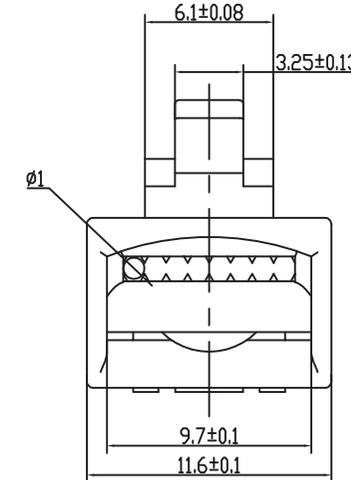
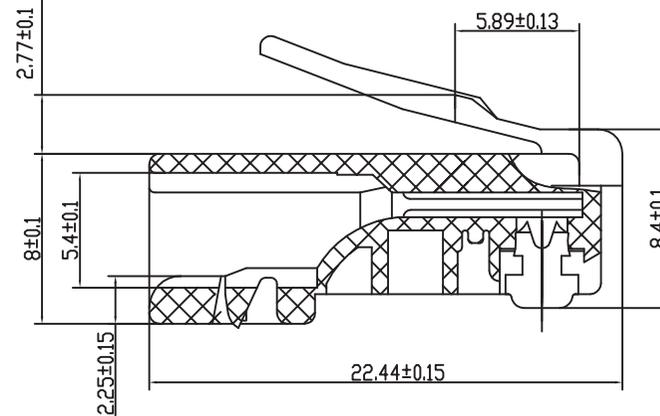
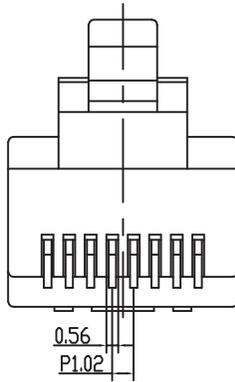


| PLATING | MATERIAL | PART NO. |
|-------------|------------------|----------------|
| Au G/F | PC UL94V-2 CLEAR | A101-88GF-A159 |
| Au G/F | PC UL94V-0 CLEAR | A101-88GF-B050 |
| Au 15u" | PC UL94V-2 CLEAR | A101-8815-A127 |
| Au 50u" | PC UL94V-2 CLEAR | A101-8850-A136 |
| Au G/F HALF | PC UL94V-2 CLEAR | A201-88GF-A012 |

| REV. | ECN NO. | DATE |
|------|---------|------|
| | | |

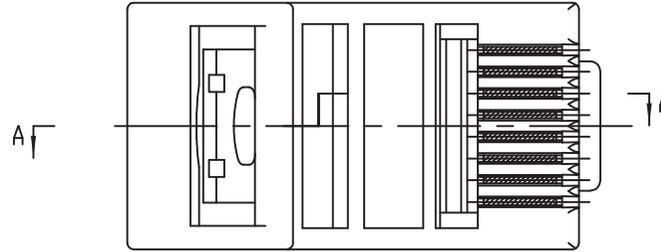

NOTE :

1. Insulation Resistance: 1000 Megohms min;
2. Withstand Voltage: 1000V, AC/minute.
3. Durability: 750 mating circles min.

| 2 | QWY-1209-1 | BLADE | QSn6.5-0.1 T=0.3 |
|-----|------------|------------------|------------------|
| 1 | H08091602 | 8P8C PLUG(48-01) | PC |
| NO. | DWG NO. | NAME | DESCRIPTION |

RoHS Compliant

Hangzhou Xitianqi Import&Export Co., Ltd.

TOLERANCES
0~10±0.1
10~20±0.15
>20±0.20
ANGLES ±1

| | | | | | |
|--------------|-----------|-----------|----------|----------|------------|
| MATERIAL: | SEE TABLE | DESIGNED: | 08.11.26 | NAME: | 8P8C-R 0.3 |
| FINISH: | SEE TABLE | CHECKED: | | DWG NO: | K08101402 |
| SHEET 1 OF 1 | | APPROVED: | | PART NO: | SEE TABLE |
| CUSTOMER: | | | | | REV |
| MODEL NO: | | | | | 01 |



A4
SIZE

SCALE
1:1

UNIT
mm

CUSTOMER:
MODEL NO:

1

2

3

4